


LASHING STAGES

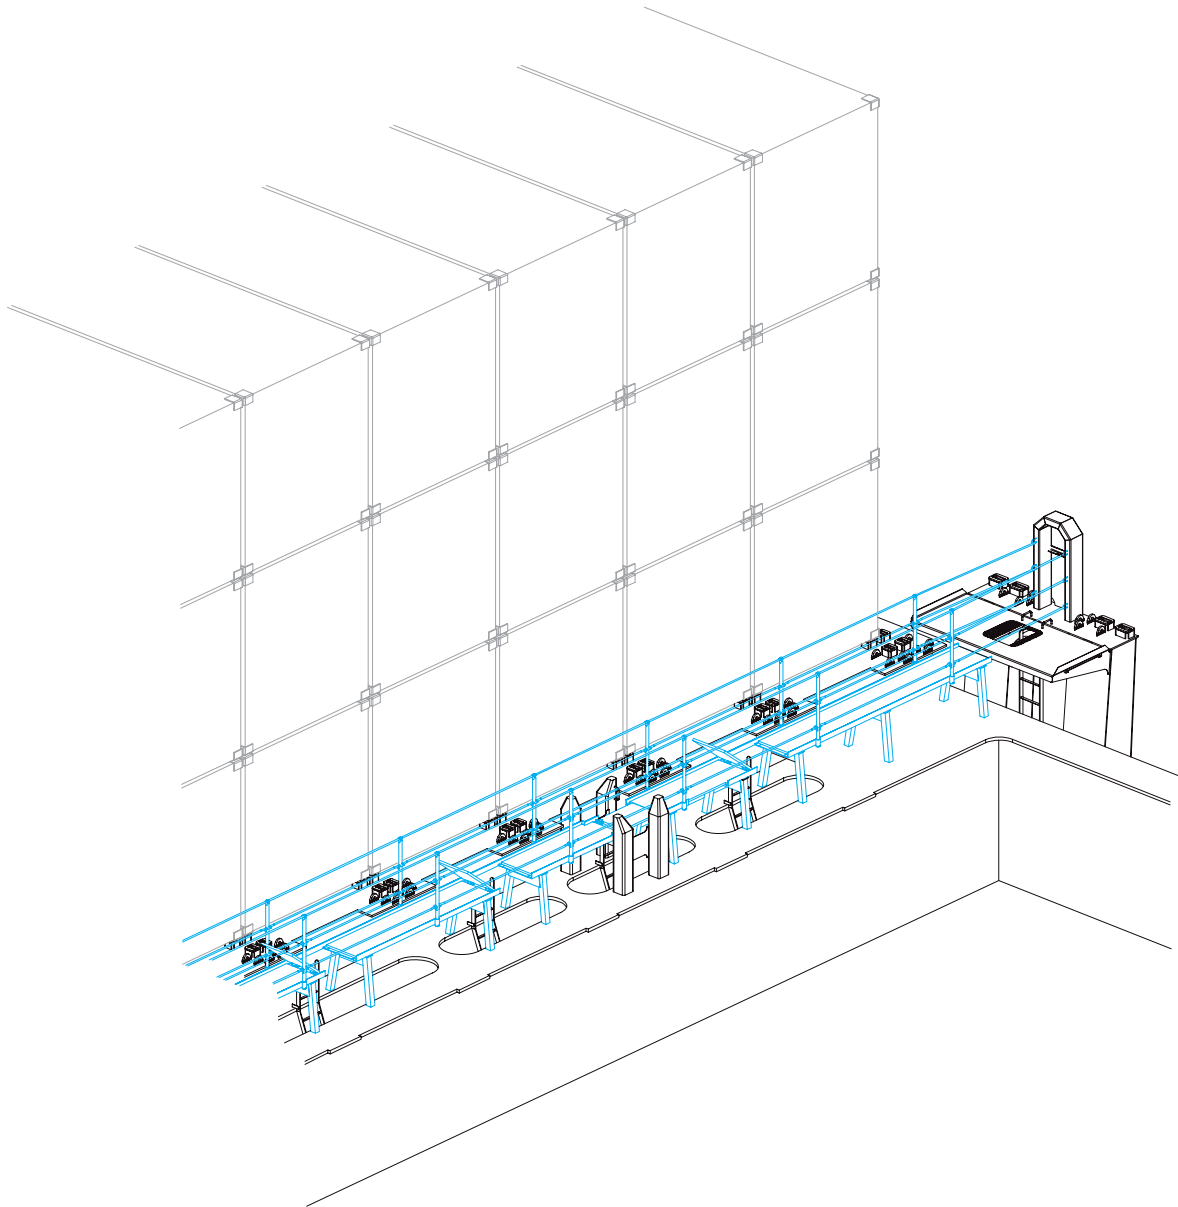

Description

Using the transversal hatch coaming as working platform for container lashing is very inconvenient for stevedores especially when there are many installations on top such as ventilation housings, hold down devices etc. For this reason it is recommended to install lashing stages at hatch cover level which will make lashing operation much easier. A perfect solution for the lashing stages is when they cross the whole breadth of

vessel with direct access to the container stanchions at both sides of the ship. When the holds are open a removable railing system should be integrated to the lashing stages for safety reason.