


Combined lashpots

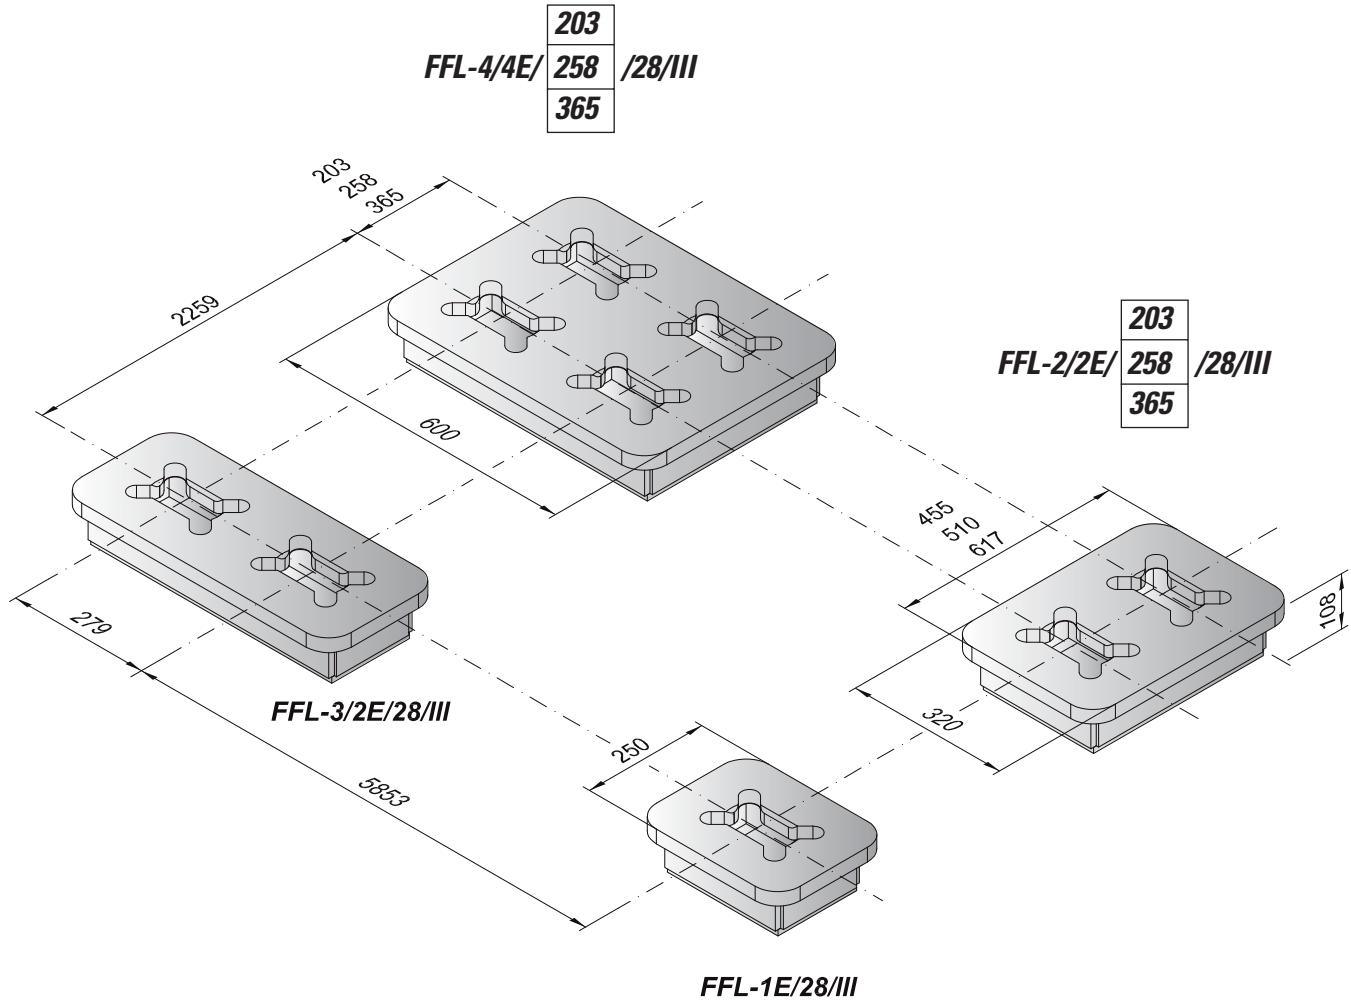

- Variation of chamfer upon request; please compare to chapter 4.4

Specification

- Min. breaking load tension 500 kN
- Approval from any classification society
- Thickness of side plating 12 mm
- Topplate with punchmarks for easy installation
- Standard distance for double foundations 203/258/365 mm
- Weldable inorganic zinc or epoxy shop primer
- Counter parts are twistlock or elephant foot