


# WEB LASHINGS FOR LIGHT VEHICLES



**Paddle buckle**

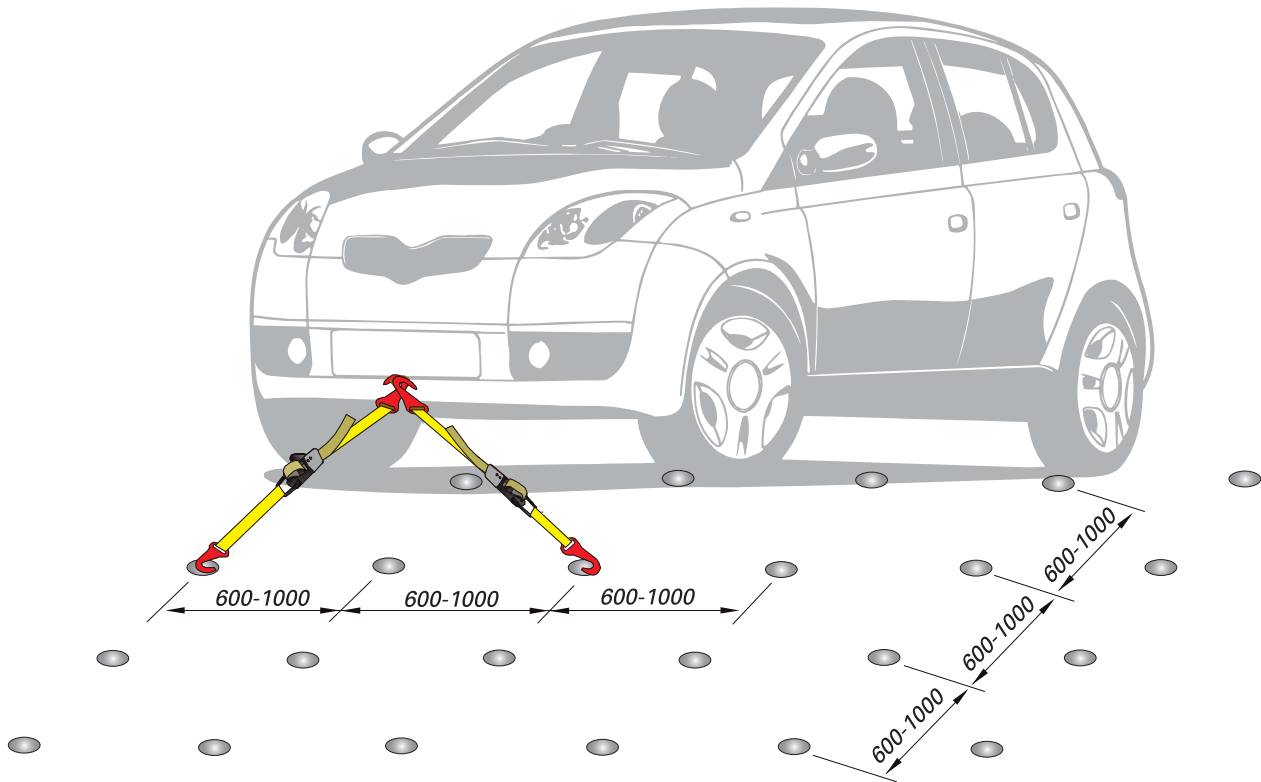

**Overcentre buckle**




**WL25-1HH1.5/150/1750**

for light-weight passenger cars (1500 daN)

**WL25-2HH1.8/150/1750**

for passenger cars, sports utility vehicles, vans etc. (1800 daN)

**Snap hook**

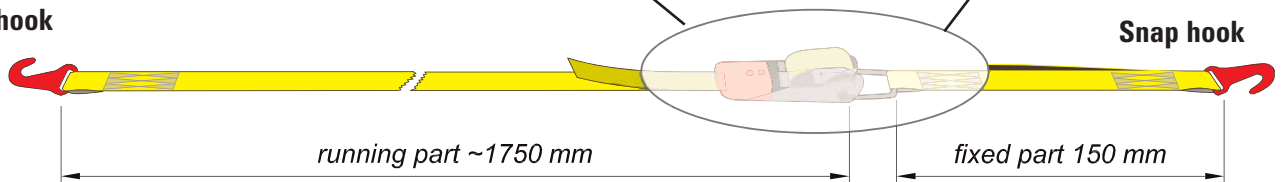

**Snap hook**

## Specification

- Min. breaking load tension 1500 daN with overcentre buckle
- Min. breaking load tension 1800 daN with paddle buckle
- High tensile polyester webbing
- Gasoline-, lubricant- and solvent-proof
- Web width = 25 mm
- Steel buckle and hooks; PVC-coated to avoid damages
- According to EN 12195-2