



## WEB LASHINGS FOR MEDIUM WEIGHT VEHICLES


**WL50-3HE5.0/500/3000** for securing of medium-weight cargoes on dedicated RoRo vessels

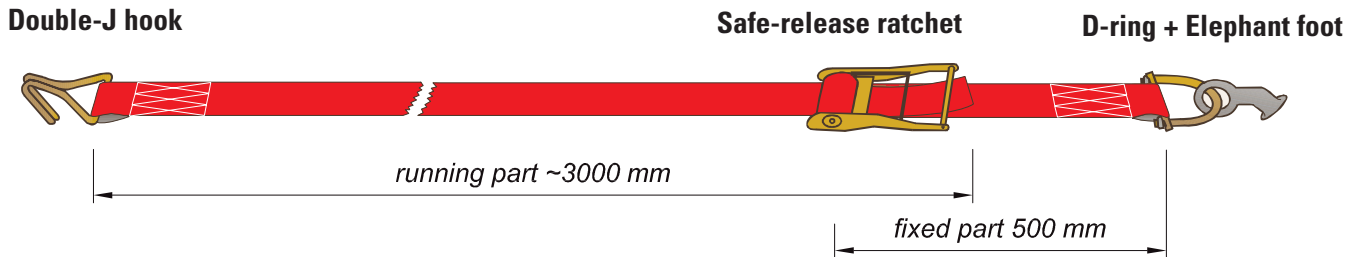

**WL50-3HH5.0/500/3000** for securing of medium-weight cargoes on merchant vessels, trucks and railways

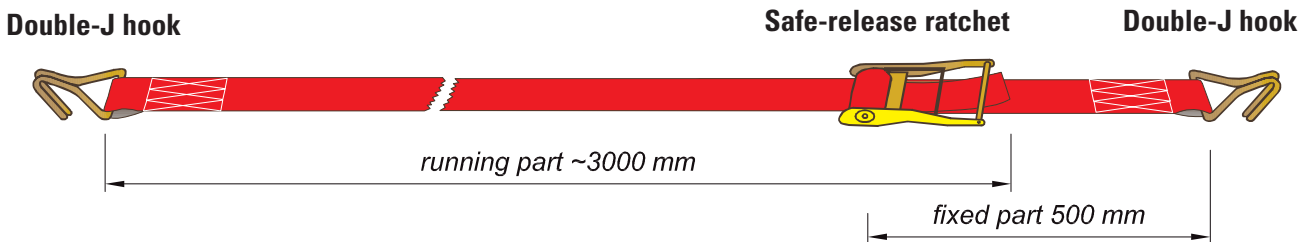

**WL50-3HH5.0/500/3000+1000** for securing of medium-weight cargoes on merchant vessels, trucks and railways

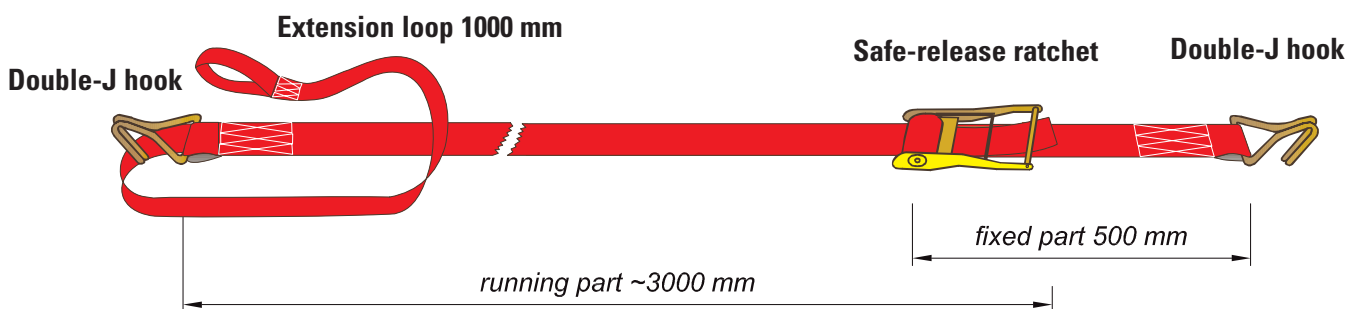

### Specification

- Min. breaking load tension 5000 daN
- High tensile polyester webbing
- Gasoline-, lubricant- and solvent-proof
- Safe-release ratchet (yellow chromatic) on fixed end
- Double-J hook (yellow chromatic) on running end
- Web width = 50 mm
- According to EN 12195-2
- Fixed and with double - J Hook or D-Ring + elephant foot

